



# Visualization in Multiobjective Optimization

---

Bogdan Filipič<sup>1</sup> Tea Tušar<sup>2,1</sup>  
GECCO Tutorial, Denver, July 20, 2016

<sup>1</sup>Department of Intelligent Systems  
Jožef Stefan Institute  
Ljubljana, Slovenia

<sup>2</sup>DOPHIN Group  
Inria Lille – Nord Europe  
Villeneuve d'Ascq, France

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the Owner/Author.  
Copyright is held by the owner/author(s).  
GECCO'16 Companion, July 20-24, 2016, Denver, CO, USA  
ACM 978-1-4503-4323-7/16/07.  
<http://dx.doi.org/10.1145/2908961.2926994>

## Final version

Tutorial slides are available at  
<http://dis.ijs.si/tea/research.htm>

## Contents

- Introduction
- Visualizing approximation sets
- Visualizing EAF values and differences
- Summary
- References

## Introduction

---

## Introduction

### Multiobjective optimization problem

Minimize

$$\mathbf{f}: X \rightarrow F$$

$$\mathbf{f}: (x_1, \dots, x_n) \mapsto (f_1(x_1, \dots, x_n), \dots, f_m(x_1, \dots, x_n))$$

- $X$  is an  $n$ -dimensional **decision space**
- $F \subseteq \mathbb{R}^m$  is an  $m$ -dimensional **objective space** ( $m \geq 2$ )

Conflicting objectives  $\rightarrow$  a set of optimal solutions

- **Pareto set** in the decision space
- **Pareto front** in the objective space

4

## Introduction

### Visualization in multiobjective optimization

Useful for different purposes [13]

- Analysis of solutions and solution sets
- Decision support in interactive optimization
- Analysis of algorithm performance

### Visualizing solution sets in the decision space

- Problem-specific
- If  $X \subseteq \mathbb{R}^m$ , any method for visualizing multidimensional solutions can be used
- Not the focus of this tutorial

5

## Introduction

### Visualizing solution sets in the objective space

- Interested in sets of mutually nondominated solutions called **approximation sets**
- Different from ordinary multidimensional solution sets
- The focus of this tutorial

### Challenges

- High dimension and large number of solutions
- Limitations of computing and displaying technologies
- Cognitive limitations


6

## Introduction

### Visualization can be hard even in 2-D

Stochastic optimization algorithms

- Single run  $\rightarrow$  single approximation set
- Multiple runs  $\rightarrow$  multiple approximation sets

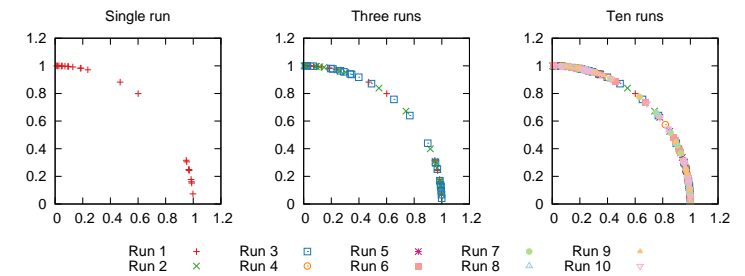

Visualization of the **Empirical Attainment Function (EAF)** can be used in such cases

7

## Introduction

### This tutorial is not about

- Visualization for decision making purposes [26]
- Visualization in the decision space
- General multidimensional visualization methods not previously used on approximation sets

### This tutorial covers

- Visualization in the objective space
- Visualization of separate approximation sets [1]
- Visualization of EAF values and differences in EAF values [2]

8

## Visualizing approximation sets

---

## Methodology

### Comparing visualization methods

- No existing methodology for comparing visualization methods
- Propose **benchmark approximation sets** (analog to benchmark problems in multiobjective optimization)
- Visualize the sets using different methods
- Observe which set properties are distinguishable after visualization

9

## Benchmark approximation sets

Two different sets that can be instantiated in any dimension [1]


- **Linear** with a uniform distribution of solutions
- **Spherical** with a nonuniform distribution of solutions (more at the corners and less at the center)
- Sets are intertwined

Size of each set

- 2-D: 50 solutions
- 3-D: 500 solutions
- 4-D: only 300 solutions since most methods cannot handle more

10

## Benchmark approximation sets

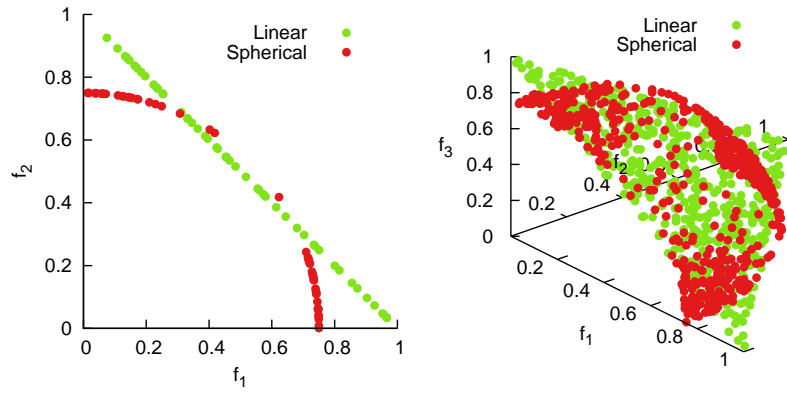

11

## Visualizing approximation sets

### Desired properties of visualization methods

- Preservation of the
  - Dominance relation
  - Front shape
  - Objective range
  - Distribution of solutions
- Robustness
- Handling of large sets
- Simultaneous visualization of multiple sets
- Scalability in number of objectives
- Simplicity

12

## Visualizing approximation sets

### Existing methods

Showing only methods previously used in multiobjective optimization

- General methods
- Specific methods – designed for visualizing approximation sets

Demonstration on 4-D benchmark approximation sets

13

## General methods

- Scatter plot matrix
- Bubble chart
- Radial coordinate visualization [16, 36]
- Parallel coordinates [17]
- Heatmaps [29]
- Sammon mapping [30, 33]
- Neuroscale [24, 10]
- Self-organizing maps [18, 27]
- Principal component analysis [39]
- Isomap [31, 21]

14

## Scatter plot matrix

Most often


- Scatter plot in a 2-D space
- Matrix of all possible combinations
- $m$  objectives  $\rightarrow \frac{m(m-1)}{2}$  different combinations

Alternatively

- Scatter plot in a 3-D space
- $m$  objectives  $\rightarrow \frac{m(m-1)(m-2)}{6}$  different combinations


15

## Scatter plot matrix

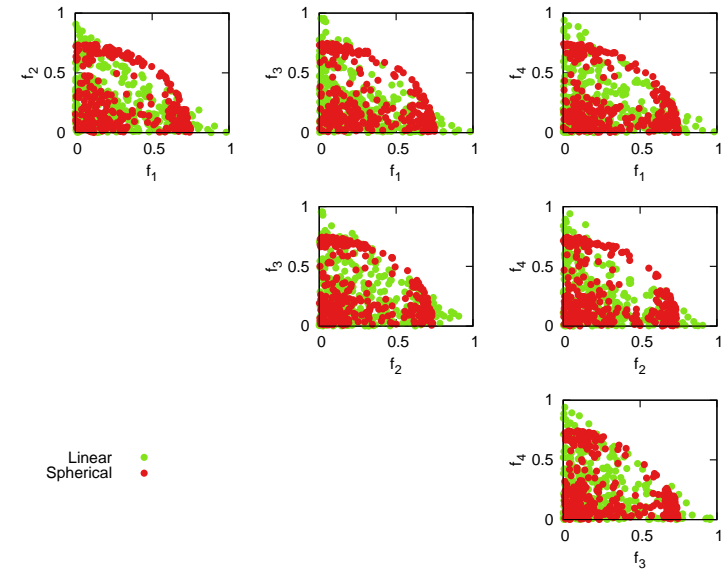

16

## Scatter plot matrix

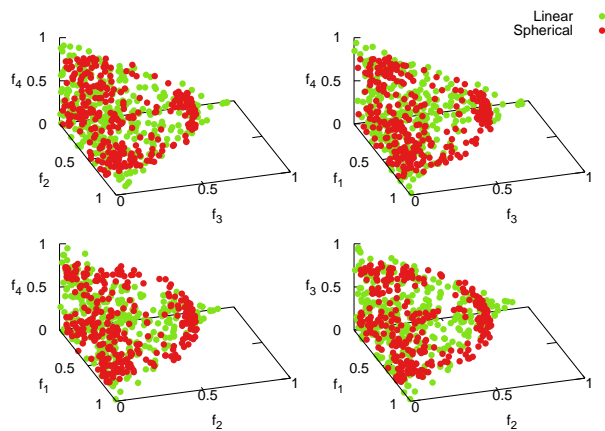

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
X	≈	✓	≈	✓	≈	✓	X	✓

17

## Bubble chart

4-D objective space


- Similar to a 3-D scatter plot
- Fourth objective visualized with point size

5-D objective space

- Fifth objective visualized with colors

18

## Bubble chart

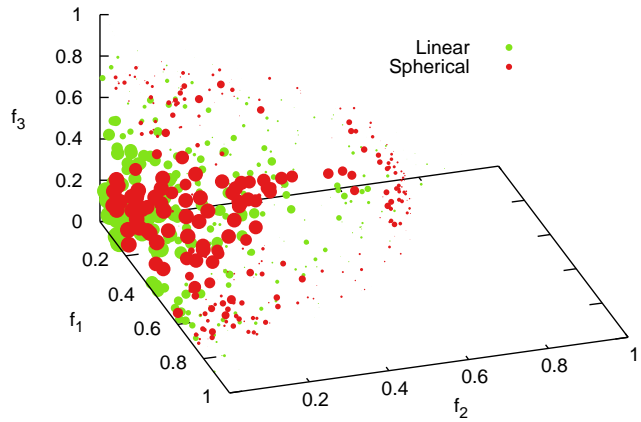


dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	≈	✓	≈	✓	≈	✓	x	✓

19

## Radial coordinate visualization


Also called **RadViz**

- Inspired from physics
- Objectives treated as anchors, equally spaced around the circumference of a unit circle
- Solutions attached to anchors with 'springs'
- Spring stiffness proportional to the objective value
- Solution placed where the spring forces are in equilibrium



20

## Radial coordinate visualization

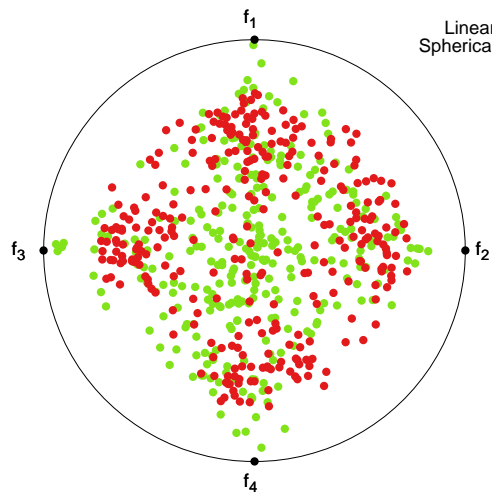


dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	≈	✓	≈	✓	✓	✓

21


## Parallel coordinates

- $m$  objectives  $\rightarrow m$  parallel axes
- Solution represented as a polyline with vertices on the axes
- Position of each vertex corresponds to that objective value
- No loss of information

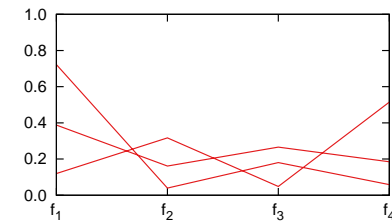

22

## Parallel coordinates

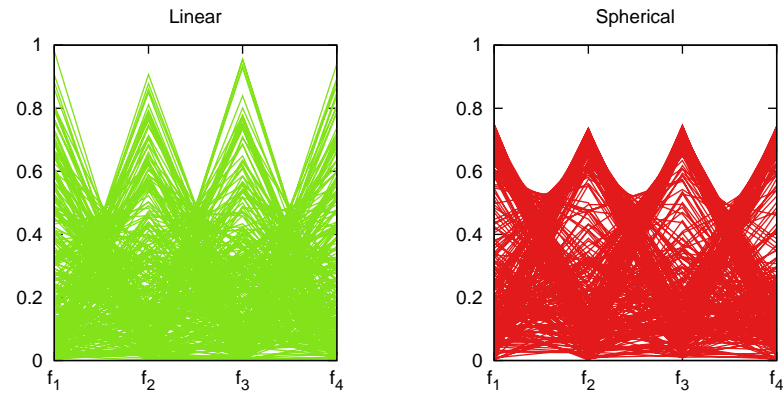

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
≈	×	✓	≈	✓	×	×	✓	✓


23

## Heatmaps

- $m$  objectives  $\rightarrow m$  columns
- One solution per row
- Each cell colored according to objective value
- No loss of information

24

## Heatmaps

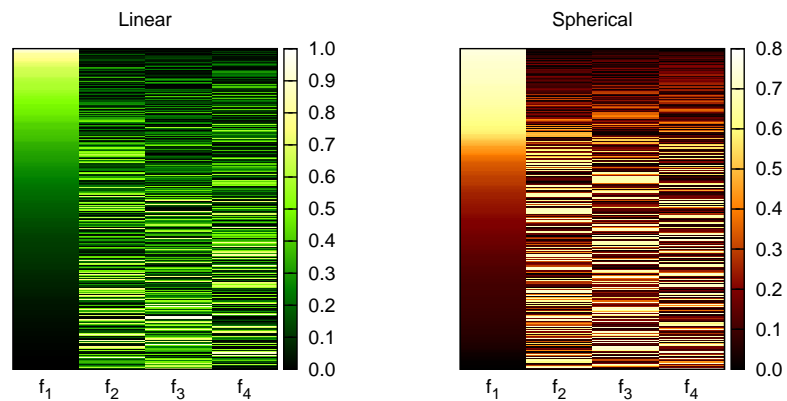

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
×	×	✓	×	✓	×	×	✓	✓

25

## Sammon mapping


- A non-linear mapping
- Aims to preserve distances between solutions
  - $d_{ij}^*$  distance between solutions  $\mathbf{x}_i$  and  $\mathbf{x}_j$  in the objective space
  - $d_{ij}$  distance between solutions  $\mathbf{x}_i$  and  $\mathbf{x}_j$  in the visualized space
- Stress function to be minimized

$$S = \sum_i \sum_{j>i} (d_{ij}^* - d_{ij})^2$$

- Minimization by gradient descent or other (iterative) methods


26

## Sammon mapping

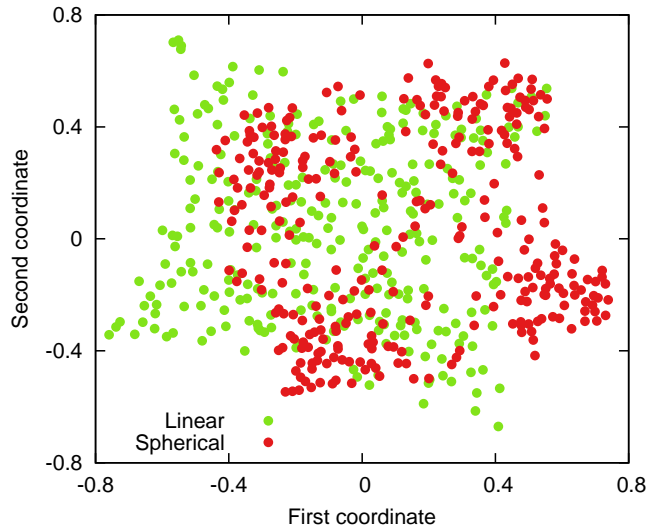

27

## Sammon mapping

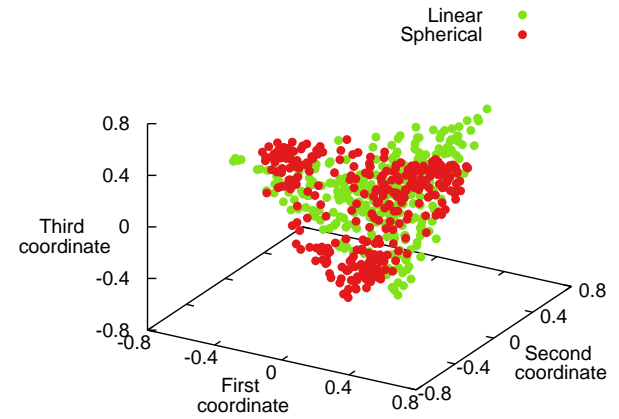

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	✓	≈	≈	✓	✓	x


28

## Neuroscale

- A non-linear mapping
- Aims to minimize the same stress function as Sammon mapping
- Uses a radial basis function neural network to model the projection

29


## Neuroscale

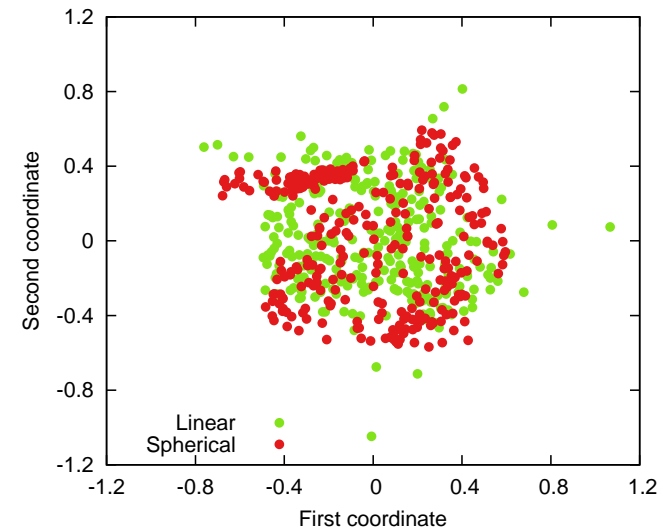

30



## Neuroscale

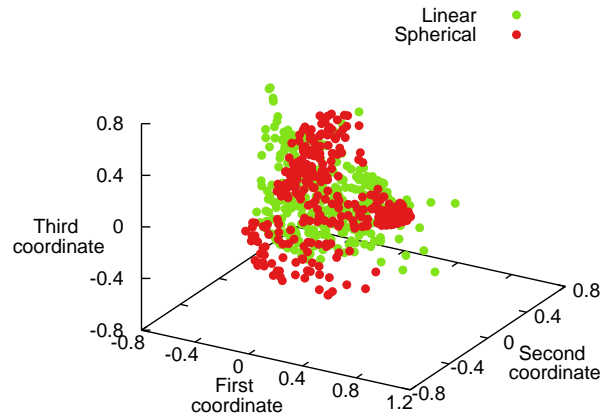

Preservation of the				Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
dominance relation	front shape	objective range	distribution of solutions					
x	x	x	x	≈	≈	✓	✓	x


31

## Self-organizing maps

- Self-organizing maps (SOMs) are neural networks
- Nearby solutions are mapped to nearby neurons in the SOM
- A SOM can be visualized using the unified distance matrix
  - Distance between adjacent neurons is denoted with color
    - Similar neurons → light color
    - Different neurons (cluster boundaries) → dark color

32

## Self-organizing maps

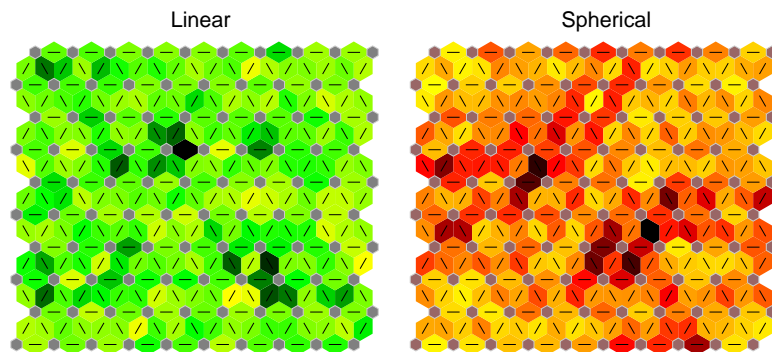

Preservation of the				Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
dominance relation	front shape	objective range	distribution of solutions					
x	x	x	x	≈	✓	x	✓	x


33

## Principal component analysis

- Principal components are linear combinations of objectives that maximize variance (and are uncorrelated with already chosen components)
- They are the eigenvectors with the highest eigenvalues of the covariance matrix

34

## Principal component analysis

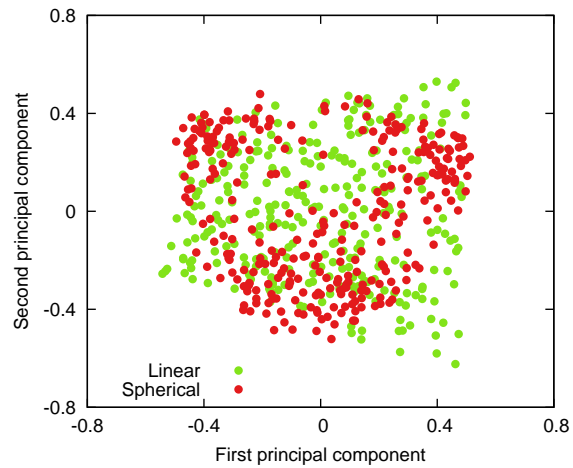

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	x	≈	≈	✓	✓	x


35

## Isomap

- Assumes solutions lie on some low-dimensional manifold and the distances along this manifold should be preserved
- Creates a graph of solutions, where only the neighboring solutions are linked
- The geodesic distance between any two solutions is calculated as the sum of Euclidean distances on the shortest path between the two solutions
- Uses multidimensional scaling to perform the mapping based on these distances


36

## Isomap

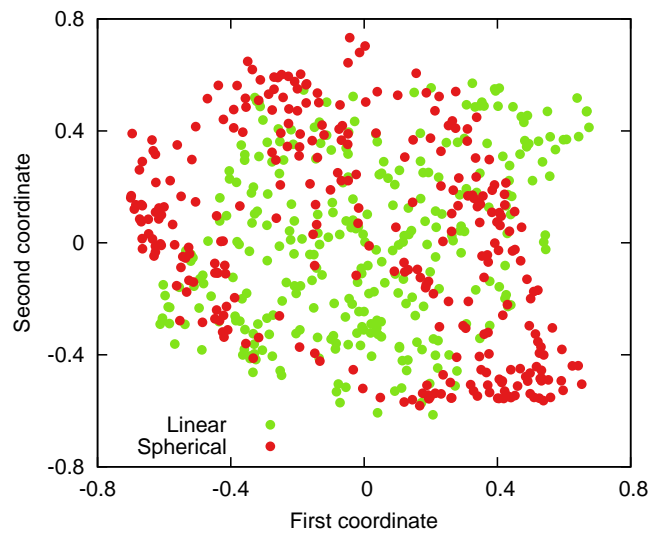

37

## Isomap

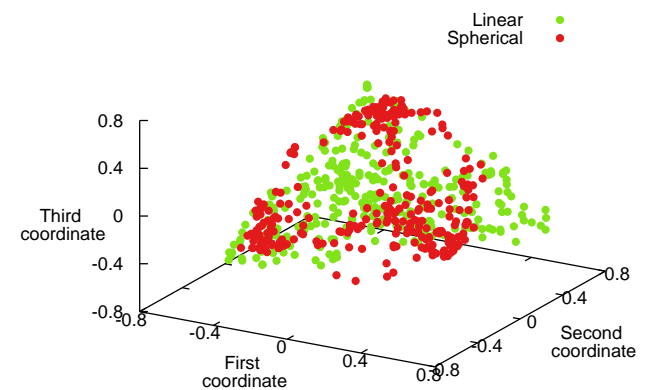

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	≈	≈	≈	✓	✓	x

38

## Summary of the general methods

Method	Preservation of the				Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	dominance relation	front shape	objective range	distribution of solutions					
Scatter plot matrix	X	≈	✓	≈	✓	≈	✓	X	✓
Bubble chart	X	≈	✓	≈	✓	≈	✓	X	✓
Radial coordinate visual.	X	X	X	≈	✓	≈	✓	✓	✓
Parallel coordinates	≈	X	✓	≈	✓	X	X	✓	✓
Heatmaps	X	X	✓	X	✓	X	X	✓	✓
Sammon mapping	X	X	X	✓	≈	≈	✓	✓	X
Neuroscale	X	X	X	X	≈	≈	✓	✓	X
Self-organizing maps	X	X	X	X	≈	✓	X	✓	X
Principal component analysis	X	X	X	X	≈	≈	✓	✓	X
Isomap	X	X	X	≈	≈	≈	✓	✓	X

39

## Specific methods

- Distance and distribution charts [4]
- Interactive decision maps [23]
- Hyper-space diagonal counting [3]
- Two-stage mapping [20]
- Level diagrams [6]
- Hyper-radial visualization [8]
- Pareto shells [35]
- Seriated heatmaps [36]
- Multidimensional scaling [36]
- Prosections [1]



40

## Distance and distribution charts

- Plot solutions against their distance to the Pareto front and distance to other solutions
- Distance chart
  - Plot distance to the nearest non-dominated solution
- Distribution chart
  - Sort solutions w.r.t. first objective
  - Plot distances between consecutive solutions
  - For the first/last solution, compute distance to first/last non-dominated solution
  - $k$  solutions  $\rightarrow k + 1$  distances
- All distances normalized to  $[0, 1]$

41

## Distance and distribution charts

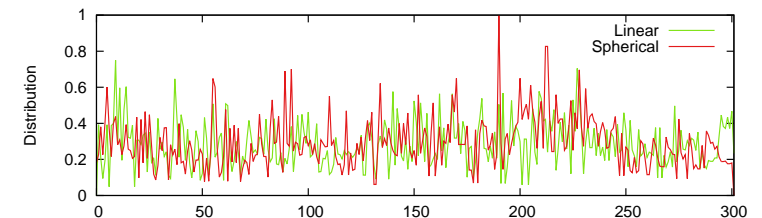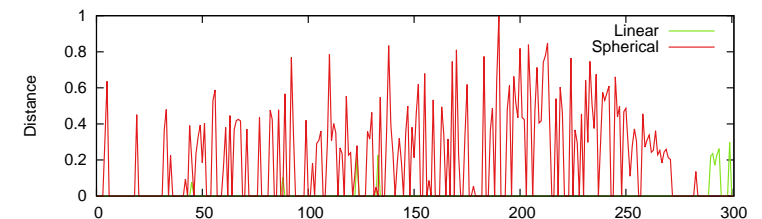

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
≈	X	X	X	✓	X	✓	✓	≈

42

## Interactive decision maps


The **Edgeworth-Pareto hull (EPH)** of an approximation set  $A$  contains all points in the objective space that are weakly dominated by any solution in  $A$ .

### Interactive decision maps

- Visualize the surface of the EPH, not the actual approximation set
- Plot a number of axis-aligned sampling surfaces of the EPH
- Color used to denote third objective
- Fixed value of the fourth objective

43

## Interactive decision maps

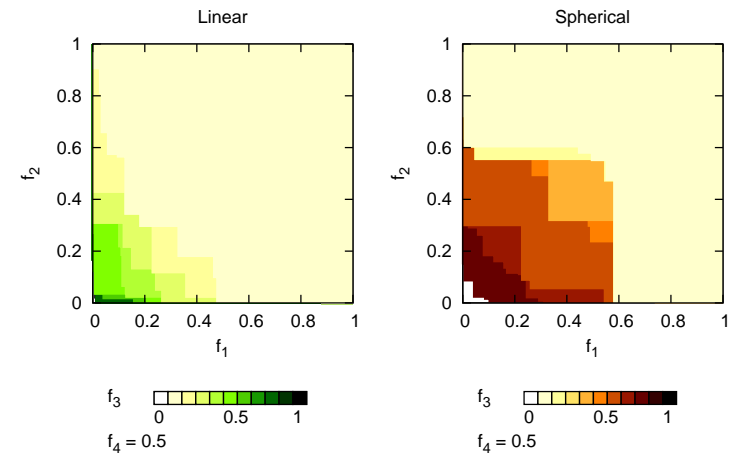


dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
×	≈	✓	≈	✓	✓	×	×	≈

44

## Hyper-space diagonal counting


- Inspired by Cantor's proof that shows  $|\mathbb{N}| = |\mathbb{N}^2| = |\mathbb{N}^3| \dots$



- Discretize each objective (choose a number of bins)
- In the 4-D case
  - Enumerate the bins for objectives  $f_1$  and  $f_2$
  - Enumerate the bins for objectives  $f_3$  and  $f_4$
  - Plot the number of solutions in each pair of bins

45

## Hyper-space diagonal counting

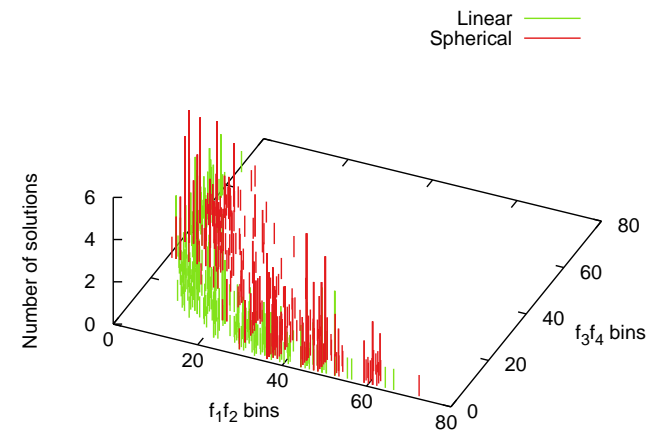

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
×	×	×	≈	✓	✓	✓	✓	≈

46


## Two-stage mapping

### Steps

- Split solutions to nondominated and dominated solutions
- Compute  $r$  as the average norm of nondominated solutions
- Find a permutation of nondominated solutions that minimizes implicit dominance errors and sum of distances between consecutive solutions
- **First stage:** distribute nondominated solutions on the circumference of a quarter-circle with radius  $r$  in the order of the permutation and with distances proportional to their distances in the objective space
- **Second stage:** map each dominated solution to the minimal point of all nondominated solutions that dominate it

47

## Two-stage mapping

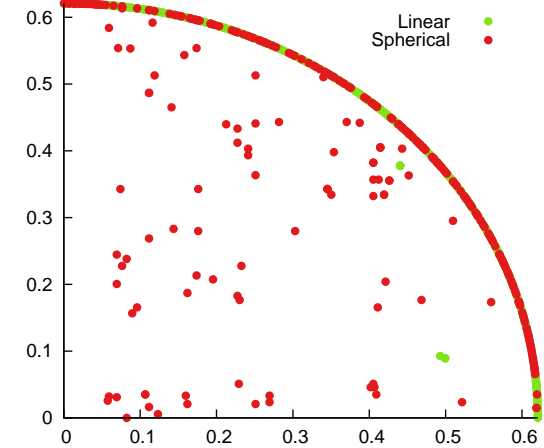

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
$\approx$	x	x	x	x	x	✓	$\approx$	x


48

## Level diagrams

- $m$  objectives  $\rightarrow m$  diagrams
- Plot solutions with objective  $f_i$  on the  $x$  axis and distance to the ideal point on the  $y$  axis

49

## Level diagrams

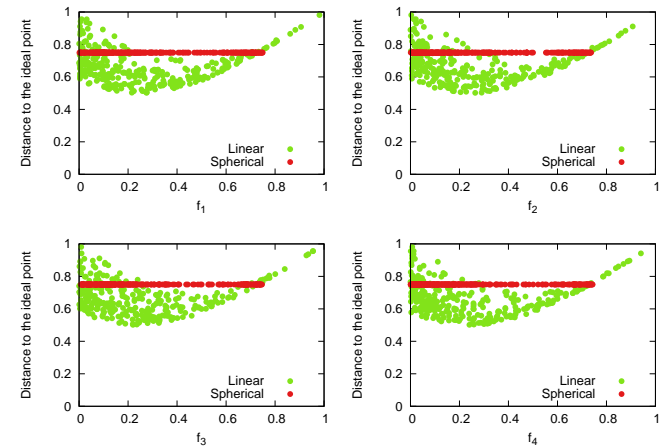

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	$\approx$	✓	x	✓	$\approx$	✓	✓	✓


50

## Hyper-radial visualization

- Solutions preserve distance (hyper-radius) to the ideal point
- Distances are computed separately for two subsets of objectives
- Indifference curves denote points with the same preference

51

## Hyper-radial visualization

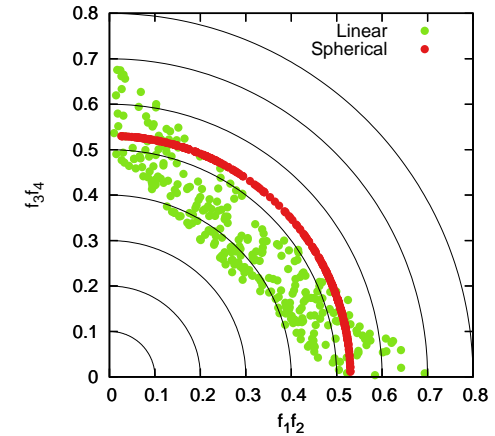

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	≈	✓	x	✓	≈	✓	✓	✓


52

## Pareto shells

- Use nondominated sorting to split solutions to Pareto shells
- Represent solutions in a graph
- Connect dominated solutions to those that dominate them (we show only one arrow per dominated solution)

53

## Pareto shells

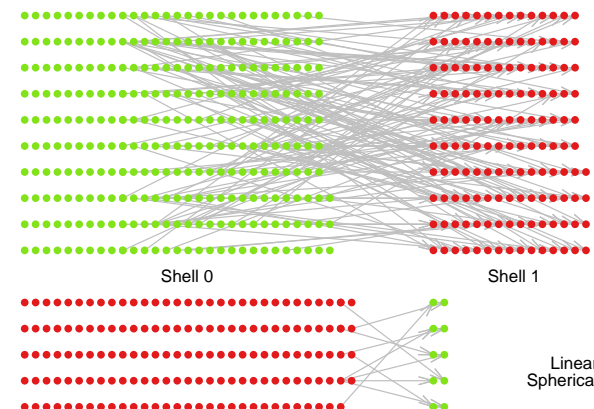

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
✓	x	x	x	x	x	✓	✓	✓


54

## Serialized heatmaps

- Heatmaps with rearranged objectives and solutions
- Similar objectives and similar solutions are placed together
- Ranks are used instead of actual objective values for a more uniform color usage
- Similarity can be computed using
  - Euclidean distance
  - Spearman's footrule
  - Kendall's  $\tau$  metric

55

## Serialized heatmaps

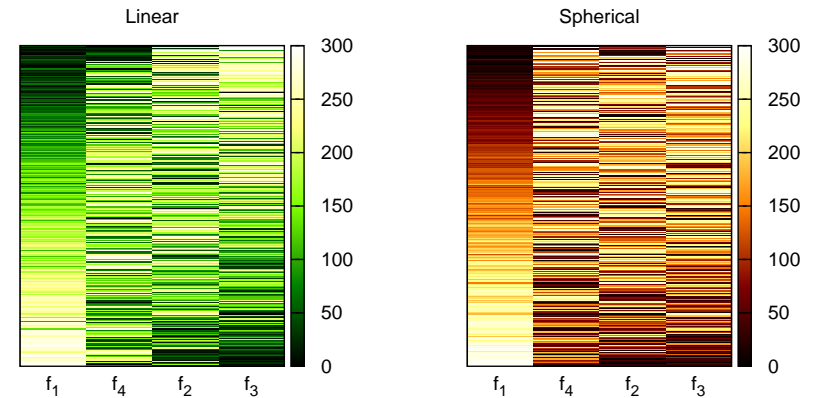

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	x	≈	x	x	✓	x

56


## Multidimensional scaling

- Classical multidimensional scaling aims at preserving similarities between solutions
- Here, **dominance distance** is used to measure similarity
- Two solutions are similar if they share dominance relationships with a third solution

$$S(\mathbf{a}, \mathbf{b}; \mathbf{z}) = \frac{1}{m} \sum_{i=1}^m [I((a_i < z_i) \wedge (b_i < z_i)) + I((a_i = z_i) \wedge (b_i = z_i)) + I((a_i > z_i) \wedge (b_i > z_i))] \\ D(\mathbf{a}, \mathbf{b}) = \frac{1}{k-2} \sum_{\mathbf{z} \notin \{\mathbf{a}, \mathbf{b}\}} (1 - S(\mathbf{a}, \mathbf{b}; \mathbf{z}))$$

57

## Multidimensional scaling

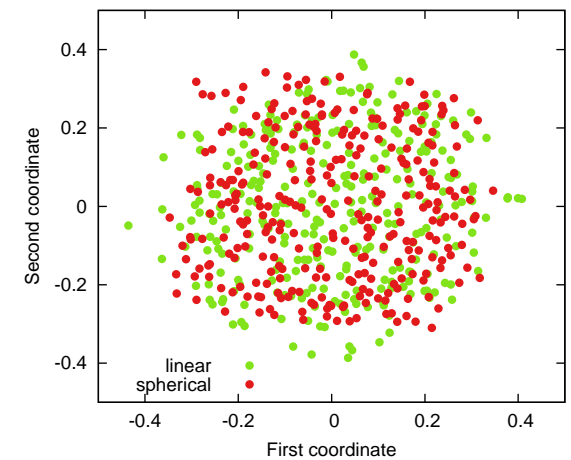


dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
x	x	x	x	x	≈	✓	✓	x

58


## Prosections

- Visualize only part of the objective space
- Dimensionality reduction by projection of solutions in a section
- Need to choose projection plane, angle and section width

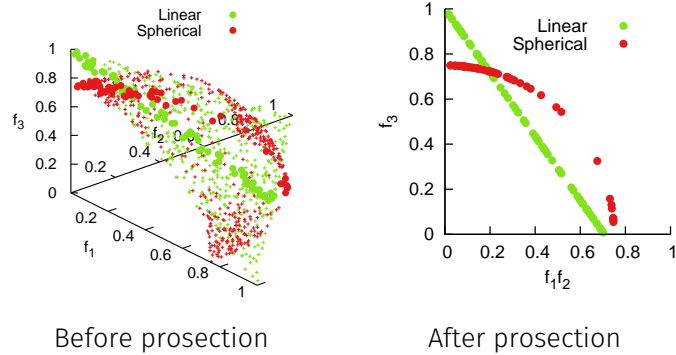

59

## Prosections

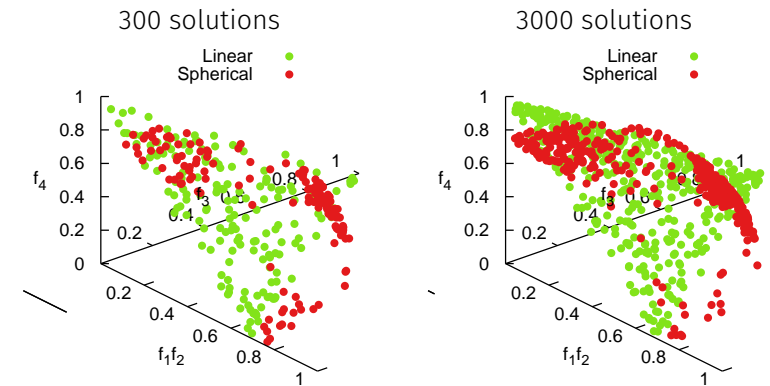

dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
	front shape	objective range	distribution of solutions					
✓	✓	≈	✓	✓	✓	✓	×	≈

60

## Summary of the specific methods

Method	dominance relation	Preservation of the			Robustness	Handling of large sets	Simultaneous visualization	Scalability	Simplicity
		front shape	objective range	distribution of solutions					
Distance and distrib. charts	≈	×	×	×	✓	×	✓	≈	
Interactive decision maps	×	≈	✓	≈	✓	✓	×	≈	
Hyper-space diagonal count.	×	×	×	≈	✓	✓	✓	≈	
Two-stage mapping	≈	×	×	×	×	✓	≈	×	
Level diagrams	×	≈	✓	×	✓	≈	✓	✓	
Hyper-radial visualization	×	≈	✓	×	×	✓	✓	✓	
Pareto shells	✓	×	×	×	×	×	✓	✓	
Seriated heatmaps	×	×	×	×	≈	×	✓	×	
Multidimensional scaling	×	×	×	×	×	✓	✓	×	
Prosections	✓	✓	≈	✓	✓	✓	×	≈	

61

## Other (newer) methods

- Tetrahedron coordinates model [5]
- Distance-based and dominance-based mappings [11]
- Aggregation trees [12]
- Trade-off region maps [28]
- Treemaps [37]
- MoGrams [32]
- Polar plots [15]
- Level diagrams with asymmetric norm [7]
- Visualization following Shneiderman mantra [19]

62




## Visualizing EAF values and differences

## Empirical attainment function

### Goal-attainment

- Approximation set  $A$
- A point in the objective space  $\mathbf{z}$  is **attained** by  $A$  when  $\mathbf{z}$  is weakly dominated by at least one solution from  $A$




63

## Empirical attainment function

### EAF values [14]

- Algorithm  $\mathcal{A}$ , approximation sets  $A_1, A_2, \dots, A_r$
- EAF of  $\mathbf{z}$  is the frequency of attaining  $\mathbf{z}$  by  $A_1, A_2, \dots, A_r$
- Summary (or  $k\%$ -) attainment surfaces

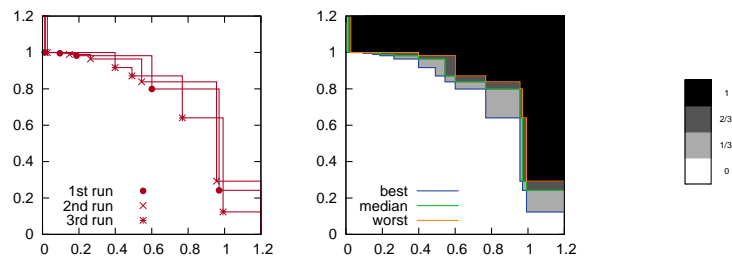


64

## Empirical attainment function

### Differences in EAF values [22]

- Algorithm  $\mathcal{A}$ , approximation sets  $A_1, A_2, \dots, A_r$
- Algorithm  $\mathcal{B}$ , approximation sets  $B_1, B_2, \dots, B_r$
- Visualize differences between EAF values

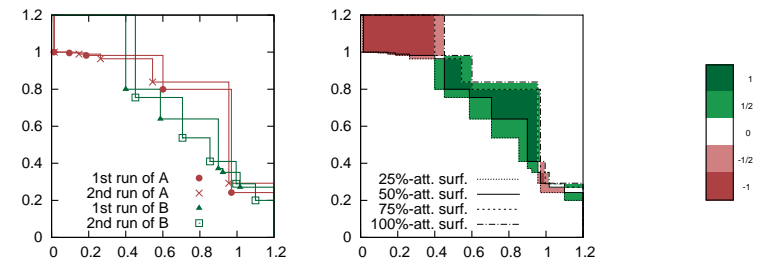

65

## Visualization of 3-D EAF

Need to compute and visualize a large number (over 10 000) of cuboids

### Exact case

- EAF values: Slicing [2]
- EAF differences: Slicing, Maximum intensity projection [38, 2]

### Approximated case


- EAF values: Slicing, Direct volume rendering [9, 2]
- EAF differences: Slicing, Maximum intensity projection, Direct volume rendering

66

## Benchmark approximation sets

### Sets of approximation sets

- 5 **linear** approximation sets with a uniform distribution of solutions (100 solutions in each)
- 5 **spherical** approximation sets with a nonuniform distribution of solutions (100 solutions in each)

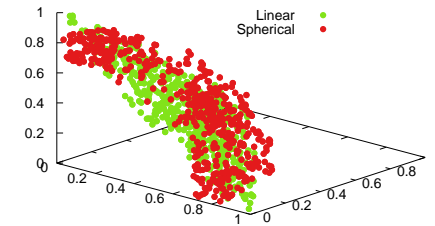


67

## Exact 3-D EAF values and differences

### Slicing


- Visualize cuboids intersecting the slicing plane
- Need to choose coordinate and angle

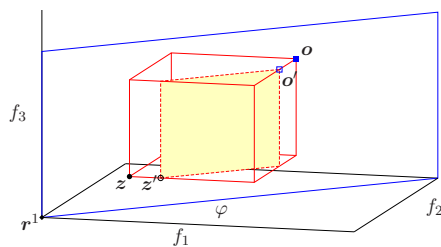

68

## Exact 3-D EAF values and differences


### Slicing

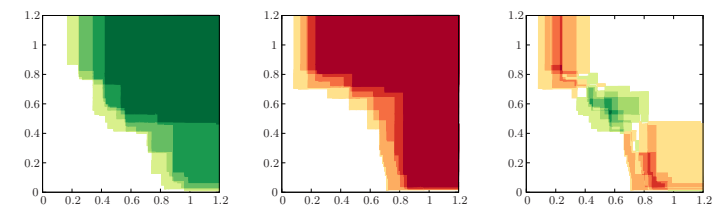


Slice of Lin  
at  $\varphi = 5^\circ$

Slice of Sph  
at  $\varphi = 5^\circ$


Slice of Lin-Sph and  
Sph-Lin at  $\varphi = 5^\circ$



Slice of Lin  
at  $\varphi = 45^\circ$



Slice of Sph  
at  $\varphi = 45^\circ$




Slice of Lin-Sph and  
Sph-Lin at  $\varphi = 45^\circ$

69

## Exact 3-D EAF differences

### Maximum intensity projection

- Volume rendering method for spatial data represented by **voxels**
- Simple and efficient
- No sense of depth, cannot distinguish between front and back

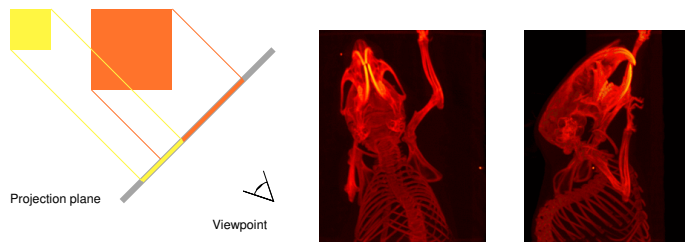


© Christian Lackas

70

## Exact 3-D EAF differences

### Maximum intensity projection

- Suitable for visualizing EAF differences (focus on large differences)
- Sorting w.r.t. EAF differences (smaller to larger)
- Plot on top of previous ones

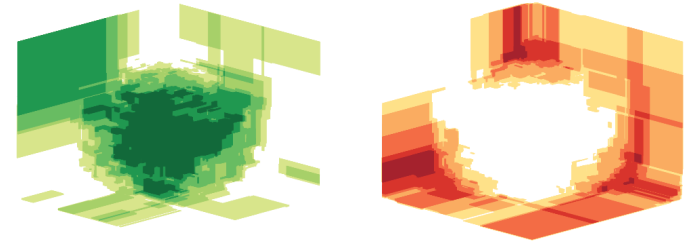


71

## The approximated case

### Discretization into voxels

- Discretization of cuboids
- Discretization from the space of EAF values/differences

### Slicing

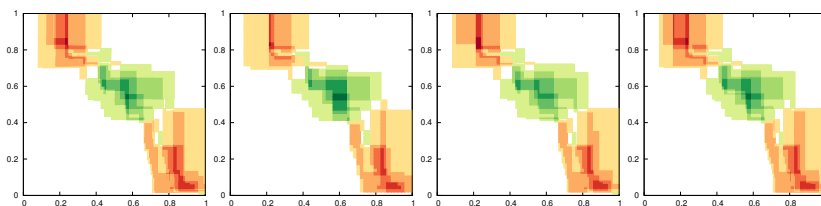

Exact

64<sup>3</sup> voxels

128<sup>3</sup> voxels


256<sup>3</sup> voxels

72

## Approximated 3-D EAF differences

### Maximum intensity projection

- Plots produced using Voreen [25, 34]
- Some loss of information

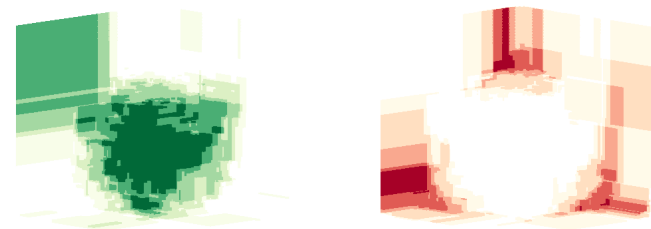

73

## Approximated 3-D EAF values and differences


### Direct volume rendering

- Volume rendering method for spatial data represented by voxels
- A **transfer function** assigns color and opacity to voxel values
- Enables to see “inside the volume”
- Requires the definition of the transfer function


74

## Approximated 3-D EAF differences


### Direct volume rendering of Lin-Sph




1/5



2/5



3/5



4/5



5/5




1/5 and 5/5


75

## Approximated 3-D EAF differences


### Direct volume rendering of Sph-Lin




1/5




2/5




3/5



4/5



5/5




1/5 and 5/5

76

## Approximated 3-D EAF values

### Direct volume rendering of Sph



1/5 and 5/5

77

## Summary

---

## Summary – Visualization of approximation sets

### General methods

- Scatter plot matrix
- Bubble chart
- Radial coordinate visualization
- Parallel coordinates
- Heatmaps
- Sammon mapping
- Neuroscale
- Self-organizing maps
- Principal component analysis
- Isomap

### Specific methods

- Distance and distribution charts
- Interactive decision maps
- Hyper-space diagonal counting
- Two-stage mapping
- Level diagrams
- Hyper-radial visualization
- Pareto shells
- Seriated heatmaps
- Multidimensional scaling
- Prosections

78

## Summary – Visualization of EAFs

### Exact 3-D case

EAF values

- Slicing

EAF differences

- Slicing
- Maximum intensity projection

### Approximated 3-D case

EAF values

- Slicing
- Direct volume rendering

EAF differences

- Slicing
- Maximum intensity projection
- Direct volume rendering

79

## Summary

- Visualization in multiobjective optimization needed for various purposes
- General methods fail to address the peculiarities of approximation set visualization
- Customized methods give more information and are currently gaining attentions

80

## Acknowledgement

This work was partially funded by the Slovenian Research Agency under research program P2-0209.



This work is part of a project that has received funding from the *European Union's Horizon 2020 research and innovation program* under grant agreement No. 692286.



SYNERGY  
Synergy for Smart Multi-Objective Optimization  
[www.synergy-twinning.eu](http://www.synergy-twinning.eu)

## References

---

## References I

- [1] T. Tušar and B. Filipič.  
**Visualization of Pareto front approximations in evolutionary multiobjective optimization: A critical review and the projection method.**  
*IEEE Transactions on Evolutionary Computation*, 19(2):225-245, 2015.
- [2] T. Tušar and B. Filipič.  
**Visualizing exact and approximated 3D empirical attainment functions.**  
*Mathematical Problems in Engineering*, Article ID 569346, 18 pages, 2014.

## References II

- [3] G. Agrawal, C. L. Bloebaum, and K. Lewis.  
**Intuitive design selection using visualized n-dimensional Pareto frontier.**  
American Institute of Aeronautics and Astronautics, 2005.
- [4] K. H. Ang, G. Chong, and Y. Li.  
**Visualization technique for analyzing nondominated set comparison.**  
SEAL '02, pages 36–40, 2002.
- [5] X. Bi and B. Li.  
**The visualization decision-making model of four objectives based on the balance of space vector.**  
IHMSC 2012, pages 365–368, 2014.

## References III

- [6] X. Blasco, J. M. Herrero, J. Sanchis, and M. Martínez.  
**A new graphical visualization of n-dimensional Pareto front for decision-making in multiobjective optimization.**  
*Information Sciences*, 178(20):3908–3924, 2008.
- [7] X. Blasco, G. Reynoso-Mezab, E. A. Sanchez Perez, and J. V. Sanchez Perez.  
**Asymmetric distances to improve n-dimensional Pareto fronts graphical analysis.**  
*Information Sciences*, 340-341:228–249, 2016.
- [8] P.-W. Chiu and C. Bloebaum.  
**Hyper-radial visualization (HRV) method with range-based preferences for multi-objective decision making.**  
*Structural and Multidisciplinary Optimization*, 40(1–6):97–115, 2010.

84

## References IV

- [9] K. Engel, M. Hadwiger, J. M. Kniss, C. Rezk-Salama, and D. Weiskopf.  
**Real-time Volume Graphics.**  
A. K. Peters, Natick, MA, USA, 2006.
- [10] R. M. Everson and J. E. Fieldsend.  
**Multi-class ROC analysis from a multi-objective optimisation perspective.**  
*Pattern Recognition Letters*, 27(8):918–927, 2006.
- [11] J. E. Fieldsend and R. M. Everson.  
**Visualising high-dimensional Pareto relationships in two-dimensional scatterplots.**  
EMO 2013, pages 558–572, 2013.

85

## References V

- [12] A. R. R. de Freitas, P. J. Fleming, and F. G. Guimaraes.  
**Aggregation trees for visualization and dimension reduction in many-objective optimization.**  
*Information Sciences*, 298:288–314, 2015.
- [13] S. Greco, K. Klamroth, J. D. Knowles, and G. Rudolph.  
**Understanding complexity in multiobjective optimization (Dagstuhl seminar 15031).**  
Dagstuhl Reports, pages 96–163, 2015.
- [14] V. D. Grunert da Fonseca, C. M. Fonseca, and A. O. Hall.  
**Inferential performance assessment of stochastic optimisers and the attainment function.**  
EMO 2001, pages 213–225, 2001.

86

## References VI

- [15] Z. He and G. G. Yen.  
**Visualization and performance metric in many-objective optimization.**  
*IEEE Transactions on Evolutionary Computation*, 20(3):386–402, 2016.
- [16] P. E. Hoffman, G. G. Grinstein, K. Marx, I. Grosse, and E. Stanley.  
**DNA visual and analytic data mining.**  
Conference on Visualization, pages 437–441, 1997.
- [17] A. Inselberg.  
**Parallel Coordinates: Visual Multidimensional Geometry and its Applications.**  
Springer, New York, NY, USA, 2009.

87

## References VII

- [18] T. Kohonen.  
***Self-Organizing Maps.***  
Springer Series in Information Sciences, 2001.
- [19] R. H. Koochaksaraei, R. Enayatifar, and F. G. Guimaraes.  
**A new visualization tool in many-objective optimization problems.**  
HAIS 2016, pages 213–224, 2016.
- [20] M. Köppen and K. Yoshida.  
**Visualization of Pareto-sets in evolutionary multi-objective optimization.**  
HIS 2007, pages 156–161, 2007.

88

## References VIII

- [21] F. Kudo and T. Yoshikawa.  
**Knowledge extraction in multi-objective optimization problem based on visualization of Pareto solutions.**  
CEC 2012, 6 pages, 2012.
- [22] M. López-Ibáñez, L. Paquete, and T. Stützle.  
**Exploratory analysis of stochastic local search algorithms in biobjective optimization.**  
Experimental Methods for the Analysis of Optimization Algorithms, pages 209–222, 2010.
- [23] A. V. Lotov, V. A. Bushenkov, and G. K. Kamenev.  
***Interactive Decision Maps: Approximation and Visualization of Pareto Frontier.***  
Kluwer Academic Publishers, Boston, MA, USA, 2004.

89

## References IX

- [24] D. Lowe and M. E. Tipping.  
**Feed-forward neural networks and topographic mappings for exploratory data analysis.**  
*Neural Computing & Applications*, 4(2):83–95, 1996.
- [25] J. Meyer-Spradow, T. Ropinski, J. Mensmann, and K. H. Hinrichs.  
**Voreen: A rapid-prototyping environment for ray-casting-based volume visualizations.**  
*IEEE Computer Graphics and Applications*, 29(6):6–13, 2009.
- [26] K. Miettinen.  
**Survey of methods to visualize alternatives in multiple criteria decision making problems.**  
*OR Spectrum*, 36(1):3–37, 2014.

90

## References X

- [27] S. Obayashi and D. Sasaki.  
**Visualization and data mining of Pareto solutions using self-organizing map.**  
EMO 2003, pages 796–809, 2003.
- [28] R. L. Pinheiro, D. Landa-Silva, and J. Atkin.  
**Analysis of objectives relationships in multiobjective problems using trade-off region maps.**  
GECCO 2015, pages 735–742, 2015.
- [29] A. Pryke, S. Mostaghim, and A. Nazemi.  
**Heatmap visualisation of population based multi objective algorithms.**  
EMO 2007, pages 361–375, 2007.

91



## References XI

- [30] J. W. Sammon.  
**A nonlinear mapping for data structure analysis.**  
*IEEE Transactions on Computers*, C-18(5):401–409, 1969.
- [31] J. B. Tenenbaum, V. de Silva, and J. C. Langford.  
**A global geometric framework for nonlinear dimensionality reduction.**  
*Science*, 290(5500):2319–2323, 2000.
- [32] K. Trawinski, M. Chica, D. P. Pancho, S. Damas, and O. Cordon.  
**moGrams: A network-based methodology for visualizing the set of non-dominated solutions in multiobjective optimization.**  
CoRR abs/1511.08178, 2015.

92

## References XII

- [33] J. Valdes and A. Barton.  
**Visualizing high dimensional objective spaces for multiobjective optimization: A virtual reality approach.**  
CEC 2007, pages 4199–4206, 2007.
- [34] Voreen, Volume rendering engine.  
**<http://www.voreen.org/>**
- [35] D. J. Walker, R. M. Everson, and J. E. Fieldsend.  
**Visualisation and ordering of many-objective populations.**  
CEC 2010, 8 pages, 2010.
- [36] D. J. Walker, R. M. Everson, and J. E. Fieldsend.  
**Visualizing mutually nondominating solution sets in many-objective optimization.**  
*IEEE Transactions on Evolutionary Computation*, 17(2):165–184, 2013.

93

## References XIII

- [37] D. J. Walker.  
**Visualising multi-objective populations with treemaps.**  
GECCO 2015, pages 963–970, 2015.
- [38] J. W. Wallis, T. R. Miller, C. A. Lerner, and E. C. Kleerup.  
**Three-dimensional display in nuclear medicine.**  
*IEEE Transactions on Medical Imaging*, 8(4):297–230, 1989.
- [39] M. Yamamoto, T. Yoshikawa, and T. Furuhashi.  
**Study on effect of MOGA with interactive island model using visualization.**  
CEC 2010, 6 pages, 2010.

94